



Bulletin A-358A

Bell & Gossett®

ZoneTrol II™ AZ-1A Snap-On Pump Relay

- **Field mountable** to any stock NRF/NBF circulator or 1/12 to 1/6 HP Series PL circulator - no need to stock separate circulators with controls attached
- **Expandable** up to three zones
- **Compact** design allows installation in tight spaces and a professional appearance
- **Economical** installation
- **5 year warranty**



www.bellgossett.com

Engineered for life

ZONETROL II AZ-1A™ Snap-On Pump Relay

Description

The ZoneTrol II AZ-1A snap on relay box is an easy to install single zone pump controller that mounts directly on any Bell & Gossett wet rotor circulator or Series PL booster. The AZ-1A turns the pump and boiler ON as thermostat calls for heat. Using the wire nuts provided with the package, the AZ-1A is quickly assembled onto any NRF/NBF or 1/12 to 1/6 HP Series PL. The clearly marked TT terminals for the thermostat and the XX isolated end switch terminals make the rest of the hook-up a snap. The AZ-1A can be daisy-chained together to form a maximum of three zones.

The Bell & Gossett AZ-1A is ideal for any single to three zone pump application. Or can be used when adding a zone to an existing system. There's no more need to have a pump controller hanging on the wall, simply install the AZ-1A to our NRF/NBF or Series PL circulators and your finished. The AZ-1A just makes Dollars and Cents.

Features

- Snap-on design allows the AZ-1A to be quickly attached to any B&G wet rotor circulator, reducing your inventory investment (no need to carry "special" circulators with factory mounted controllers)
- Clearly marked terminals make for sure, fast wiring of the system
- Compact design fits in tight locations and presents a clean professional appearance
- 100% factory tested assures reliable operation
- 5 year warranty — the best in the industry
- Daisy-Chain the AZ-1A relays to form up to three zones
- Can be used on any B&G model NRF, NBF or 1/12 to 1/6 HP Series PL pumps




Specifications

Model No.	Part No.	Transformer	Motor Rating 1/6 HP	Power Input
AZ-1A	109423	2.5 VA	24 VAC / 5 amps	115 V, 60 Hz, 1ø

Dimensions (L x W x H) 2-7/8" X 3-1/4" X 2-5/8"
Approximate Shipping Weight 0.75 lbs

The AZ-1A can be daisy-chained to form up to three zones with simplified wiring.

Low voltage wiring makes multiple relay connections a snap.

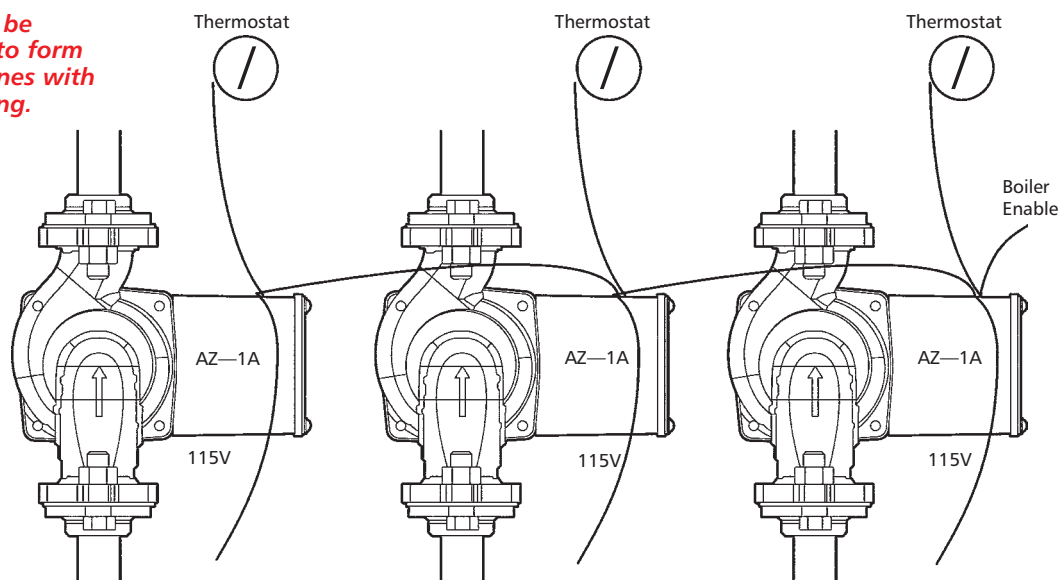

ITT

Engineered for life

ITT
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: 847/966-3700
FAX: 847/966-9052
www.bellgossett.com

